



Deutsches
Forschungszentrum
für Künstliche
Intelligenz GmbH

**Research
Report**
RR-92-38

**An Alternative to Θ -Subsumption based
on Terminological Reasoning**

Philipp Hanschke, Manfred Meyer

August 1992

**Deutsches Forschungszentrum für Künstliche Intelligenz
GmbH**

Postfach 20 80
D-6750 Kaiserslautern, FRG
Tel.: (+49 631) 205-3211/13
Fax: (+49 631) 205-3210

Stuhlsatzenhausweg 3
D-6600 Saarbrücken 11, FRG
Tel.: (+49 681) 302-5252
Fax: (+49 681) 302-5341

Deutsches Forschungszentrum für Künstliche Intelligenz

The German Research Center for Artificial Intelligence (Deutsches Forschungszentrum für Künstliche Intelligenz, DFKI) with sites in Kaiserslautern and Saarbrücken is a non-profit organization which was founded in 1988. The shareholder companies are Atlas Elektronik, Daimler Benz, Fraunhofer Gesellschaft, GMD, IBM, Insiders, Mannesmann-Kienzle, Philips, SEMA Group Systems, Siemens and Siemens-Nixdorf. Research projects conducted at the DFKI are funded by the German Ministry for Research and Technology, by the shareholder companies, or by other industrial contracts.

The DFKI conducts application-oriented basic research in the field of artificial intelligence and other related subfields of computer science. The overall goal is to construct *systems with technical knowledge and common sense* which - by using AI methods - implement a problem solution for a selected application area. Currently, there are the following research areas at the DFKI:

- Intelligent Engineering Systems
- Intelligent User Interfaces
- Intelligent Communication Networks
- Intelligent Cooperative Systems.

The DFKI strives at making its research results available to the scientific community. There exist many contacts to domestic and foreign research institutions, both in academy and industry. The DFKI hosts technology transfer workshops for shareholders and other interested groups in order to inform about the current state of research.

From its beginning, the DFKI has provided an attractive working environment for AI researchers from Germany and from all over the world. The goal is to have a staff of about 100 researchers at the end of the building-up phase.

Prof. Dr. Gerhard Barth
Director

An Alternative to Θ -Subsumption Based on Terminological Reasoning

Philipp Hanschke, Manfred Meyer

DFKI-RR-92-38

This report appears also in:

ECAI'92 Workshop *Logical Approaches to Machine Learning* LAML'92

This work has been supported by a grant from The Federal Ministry for Research and Technology (FKZ ITW-8902 C4)

© Deutsches Forschungszentrum für Künstliche Intelligenz 1992

This work may not be copied or reproduced in whole or in part for any commercial purpose. Permission to copy in whole or in part without payment of fee is granted for nonprofit educational and research purposes provided that all such whole or partial copies include the following: a notice that such copying is by permission of Deutsches Forschungszentrum für Künstliche Intelligenz, Kaiserslautern, Federal Republic of Germany; an acknowledgement of the authors and individual contributors to the work; all applicable portions of this copyright notice. Copying, reproducing, or republishing for any other purpose shall require a licence with payment of fee to Deutsches Forschungszentrum für Künstliche Intelligenz.

An Alternative to Θ -Subsumption Based on Terminological Reasoning

Philipp Hanschke *Manfred Meyer*
German Research Center for AI (DFKI)
Kaiserslautern, Germany
{hanschke,meyer}@dfki.uni-kl.de

Abstract

Clause subsumption and rule ordering are long-standing research topics in machine learning (ML). Since logical implication can be reduced to rule-subsumption, the general subsumption problem for Horn clauses is undecidable [Plotkin, 1971b]. In this paper we suggest an alternative knowledge-representation formalism for ML that is based on a terminological logic. It provides a decidable rule-ordering which is at least as powerful as Θ -subsumption.

Contents

1	Introduction	3
2	Terminological Reasoning	3
3	The Rule Formalism	5
4	Ordering the Rules	6
5	Conclusions	8

1 Introduction

There are two ways how to get a decidable rule ordering:

- One can restrict the expressiveness of the underlying knowledge representation language such that logical implication becomes decidable, e.g. Buntine's *generalized subsumption* [Buntine, 1988] with restriction to DATALOG.
- Alternatively, the rule ordering can be defined using only a weak approximation of logical implication. For example, the subset test used for Θ -subsumption [Plotkin, 1971a] is such a correct but incomplete operationalization of logical implication.

In the former case, as a side effect, the class of knowledge that can be learned will be very restricted, too. In the latter approach, the learning algorithms cannot be optimal, since they are always based on a suboptimal rule ordering. However, the class of knowledge that can be learned remains unconstrained in that case.

Θ -subsumption relies on the instantiation ordering of Herbrand terms which implies additional deficits: There are "too many" terms that are incomparable w.r.t. the instantiation ordering of Herbrand terms (e.g., $f(a, b)$, $f(a, a)$, $f(b, b)$, $f(b, a)$ are all incomparable). The weakness is also indicated by the fact that there are *linear* decision procedures for the instantiation problem of Herbrand terms.

These deficits are somehow inherent to the underlying Horn logic. As an alternative, we propose a rule-formalism based on a terminological logic (TL). This enables us to define a rule ordering much as Θ -subsumption, but which is based on terminological inferences instead of instantiation of Herbrand terms.

As terminological reasoning formalisms are tuned to be as much as expressive while remaining tractable or at least decidable, we gain a more fine grain ordering of an expressive and intuitive rule formalism (see [Boley *et al.*, 1991] for an application of a hybrid formalism including terminological logic, rules and constraints).

The rest of this paper is organized as follows: We start with an informal introduction to terminological logics (Section 2) before we construct in Section 3 the rule language from this formalism. In Section 4 we define the new rule ordering and illustrate it with an example. The paper then shows that our approach can be instantiated to Horn logic with Θ -subsumption.

2 Terminological Reasoning

In this Section we will introduce the *assertional* formalism (A-box) and the *terminological* formalism (T-box) of the concept language \mathcal{ALCF} as a prototypical representant of the family of terminologic formalisms (e.g. [Borgida *et al.*, 1989])

that originated with KL-ONE [Brachman and Schmolze, 1985]. It is sufficiently rich to simulate Herbrand terms (see below) and to demonstrate our ideas. It is also possible to employ an even more expressive member of the family. As a new reasoning service we shall introduce *subsumption of A-boxes* which is crucial for our rule-ordering.

A *terminology* of the T-box consists of a set of *concept definitions* $C = t$ where C is the newly introduced concept name and t is a concept term constructed from concept names, roles, and attributes using the following concept forming operators:

<i>conjunction</i>	(\sqcap)
<i>disjunction</i>	(\sqcup)
<i>negation</i>	(\neg)
<i>value-restriction</i>	$(\forall \text{'role/attribute'.'concept term'})$
<i>exists-in restriction</i>	$(\exists \text{'role/attribute'.'concept term'})$

The following is a terminology on families.

Female	=	$\neg \text{Male}$
Parent	=	$\text{Human} \sqcap \exists \text{child.Human}$
Woman	=	$\text{Human} \sqcap \text{Female}$
Man	=	$\text{Human} \sqcap \text{Male}$
Fos	=	$\text{Parent} \sqcap \text{Male} \sqcap \forall \text{child.Male}$
Mod	=	$\text{Parent} \sqcap \text{Female} \sqcap \forall \text{child.Female}$

In this toy terminology **Male** and **Human** are primitive concepts (i.e., they do not occur on the left-hand side of an equation), **child** is a role, and the other names are defined concepts.

It is possible to define a mapping from concept terms into first-order formulas providing a precise semantics. It is defined by a family of mappings ψ_x . Let C denote a concept name, R a role or attribute name, x a variable, and let s and t be concept terms. Then concept terms and the mappings can be defined according to the following scheme:

1. $\psi_x : C \mapsto C(x)$
2. $\psi_x : s \sqcap t \mapsto \psi_x s \wedge \psi_x t$
 $\psi_x : s \sqcup t \mapsto \psi_x s \vee \psi_x t$
 $\psi_x : \neg t \mapsto \neg \psi_x t$
 $\psi_x : \exists R.s \mapsto \exists y : (R(x, y) \wedge \psi_y s)$; with y a variable different from x
 $\psi_x : \forall R.s \mapsto \forall y : (R(x, y) \Rightarrow \psi_y s)$; with y a variable different from x

A concept definition $C = t$ is mapped to the formula $\forall x : (\psi_x C \Leftrightarrow \psi_x t)$.

In an *A-box* (assertional box) concepts, roles, and attributes can be instantiated by individuals. Formally, an A-box is a *finite* set of role assertions $((i, j) : r)$, membership assertions $(i : t)$, and equalities $(i = j)$, where i and j are individual names, r is a role or attribute name, and t is a concept term. Assertional axioms map as follows to first-order formulas:

$$\begin{aligned} (i, j) : r &\longmapsto r(i, j) \\ i : t &\longmapsto \psi_i t \\ i = j &\longmapsto i = j \end{aligned}$$

In the images, individuals are considered as variables that are existentially quantified at A-box level. Note that we do not have a unique-name assumption.

Definition 2.1 (A-box subsumption) *Assume two A-boxes A and B such that x_1, \dots, x_n , $n > 0$, are exactly the individuals which occur both in A and B . Then A subsumes B w.r.t. x_1, \dots, x_n iff $\forall x_1, \dots, x_n : (\psi(B) \Rightarrow \psi(A))$ is a theorem in the theory generated by the current terminology.*

Two individuals i and j are *directly* linked in an A-box iff the A-box contains a role assertion of the form $(i, j) : R$ or $(j, i) : R$. *Linked* is the transitive reflexive closure of directly linked. An A-box is called *rooted* by (individuals) x_1, \dots, x_n , $n > 0$, iff every individual in the A-box is linked to at least one of the x_i and all x_i occur in the A-box. We have the following result:

Theorem 2.2 *For two A-boxes A and B which are both rooted by individuals x_1, \dots, x_n , $n > 0$, the A-box subsumption problem can be effectively decided.*

It turns out that this result holds also for various other concept languages, for example, [Baader and Hanschke, 1991].

3 The Rule Formalism

The rule language is based on the terminological formalism of the previous section. Its operational semantics can be based on a CLP scheme [Smolka, 1989; Jaffar and Lassez, 1987].

A *rule* takes the following form

$$p_0(\underline{x}^{(0)}) \leftarrow p_1(\underline{x}^{(1)}), \dots, p_n(\underline{x}^{(n)}), A(\underline{x}^{(0)}, \dots, \underline{x}^{(n)}).$$

where the p_i are predicate symbols with arities n_i , the $\underline{x}^{(i)}$ are tuples of individuals $(x_{i1}, \dots, x_{in_i})$, and $A(\underline{x}^{(0)}, \dots, \underline{x}^{(n)})$ is an A-box rooted by the individuals in the $\underline{x}^{(i)}$. It is interpreted as a logical formula in the obvious way.

In the next section we shall use a more compact notation for (a subclass of) rooted A-boxes, called ϕ -terms, which is inspired by Ait-Kaci's ψ -terms.

For example, the following fact in ϕ -term syntax

$$p(X : \text{Woman}\{\text{child} > Y : \text{Man}\{\text{child} > S : \text{Human}\} \\ \text{child} > S : \text{Female}\}) \leftarrow \text{true.}$$

translates to the following rule with an A-box that is rooted by X

$$p(X) \leftarrow \begin{array}{l} X : \text{Woman}, \\ Y : \text{Man}, \\ S : \text{Female}, \\ S : \text{Human}, \\ (X, Y) : \text{child}, \\ (X, S) : \text{child}, \\ (Y, S) : \text{child}. \end{array}$$

Note, that Y could be instantiated with Ödipus.

4 Ordering the Rules

The idea behind the rule ordering is essential the same as for Θ -subsumption. The only difference is that instead of searching for a substitution Θ that acts as a witness for the instantiation relation, we employ the A-box subsumption of the terminological formalism. We call our ordering of rules *TL-subsumption*.

Assume that two rules

$$\begin{array}{l} p_0(\underline{x}^{(0)}) \leftarrow p_1(\underline{x}^{(1)}), \dots, p_n(\underline{x}^{(n)}), A(\underline{x}^{(0)}, \dots, \underline{x}^{(n)}). \\ q_0(\underline{y}^{(0)}) \leftarrow q_1(\underline{y}^{(1)}), \dots, q_m(\underline{y}^{(m)}), B(\underline{y}^{(0)}, \dots, \underline{y}^{(m)}). \end{array}$$

over disjoint sets of variables are given. The p -rule is more general than the q -rule w.r.t. *TL-subsumption* ($<_{TL}$) iff there is a substitution σ such that the following holds:

1. $p_0(\underline{x}^{(0)})\sigma$ and $q_0(\underline{y}^{(0)})$ are equal,
2. $\{p_1(\underline{x}^{(1)})\sigma, \dots, p_n(\underline{x}^{(n)})\sigma\} \subseteq \{q_1(\underline{y}^{(1)}), \dots, q_m(\underline{y}^{(m)})\}$ and
3. the A-box

$$A(\underline{x}^{(0)}, \dots, \underline{x}^{(n)})\sigma$$

subsumes the A-box

$$B(\underline{y}^{(0)}, \dots, \underline{y}^{(m)})$$

w.r.t. $\underline{x}^{(1)}\sigma, \dots, \underline{x}^{(n)}\sigma$.

To illustrate TL-subsumption consider the following example in the domain of “*soap-opera story generation*”. We want to order rules which state under which conditions a man and a woman should marry.

A very general rule is as follows:

$$\begin{aligned} \text{marry}(X, Y) \leftarrow & \\ & \text{visits}(X:\text{Man}, L:\text{Location}), \\ & \text{visits}(Y:\text{Woman}, L). \end{aligned} \quad (1)$$

Here *Location* is a primitive concept, and the rule says that two people should marry if they meet at some location. This rule can, for example, be made more restrictive by further restricting the variables by additional literals or (more special) concepts:

$$\begin{aligned} \text{marry}(X, Y) \leftarrow & \\ & \text{visits}(X:\text{Father}, L:\text{Location}), \\ & \text{visits}(Y:\text{Mother}, L). \end{aligned} \quad (2)$$

$$\begin{aligned} \text{marry}(X, Y) \leftarrow & \\ & \text{visits}(X:\text{Father}, L:\text{Location}), \\ & \text{visits}(Y:\text{Mother}, L:\text{Pleasant}). \end{aligned} \quad (3)$$

$$\begin{aligned} \text{marry}(X, Y) \leftarrow & \\ & \text{visits}(X:\text{Man}\{\text{child}\>\text{Son}:\text{Man}\}, L:\text{Location}), \\ & \text{visits}(Y:\text{Woman}\{\text{child}\>\text{Daughter}:\text{Woman}\}, L). \end{aligned} \quad (4)$$

$$\begin{aligned} \text{marry}(X, Y) \leftarrow & \\ & \text{visits}(X:\text{Fos}\{\text{child}\>\text{Son}:\text{Man}\}, L:\text{Location}), \\ & \text{visits}(Y:\text{Mod}\{\text{child}\>\text{Daughter}:\text{Woman}\}, L), \\ & \text{married}(\text{Son}, \text{Daughter}). \end{aligned} \quad (5)$$

Here *Pleasant* is again a primitive concept, and we get the following ordering of the rules:

$$\begin{aligned} (1) <_{TL} (2) <_{TL} (3) \\ (2) <_{TL} (4) <_{TL} (5) \end{aligned}$$

The rules (3) and (4) as well as (3) and (5) are not comparable w.r.t. $<_{TL}$.

As our terminological formalism provides attributes and a complement operator it is possible to map Herbrand terms into the set of A-boxes that are rooted by one individual such that two Herbrand terms s and t are unifiable iff $\tilde{s}(X), \tilde{t}(Y), X = Y$ is satisfiable. Here \tilde{s} and \tilde{t} are the images under the mapping mentioned before. This embedding naturally extends to a mapping from Horn rules to our rule formalism.

We have the following result that shows that TL-subsumption is at least as powerful as Θ -subsumption.

Theorem 4.1 *Let two Horn rules r_1 and r_2 be given. Then r_1 is more general than r_2 w.r.t. Θ -subsumption iff $\tilde{r}_1 <_{TL} \tilde{r}_2$.*

5 Conclusions

In this paper we have presented an alternative knowledge-representation formalism for ML based on a terminological logic. It allows a decidable rule-ordering which is at least as powerful as Θ -subsumption. Future research should explore the benefit one could get by adapting existing ML algorithms for Horn logic to our rule formalism. In particular, it should be explored to which extent the reasoning services of terminological systems such as individual/concept classification and consistency tests [Nebel, 1990] could be employed in future enhanced ML algorithms.

References

- [Baader and Hanschke, 1991] F. Baader and P. Hanschke. A scheme for integrating concrete domains into concept languages. In *IJCAI*, 1991.
- [Boley *et al.*, 1991] H. Boley, P. Hanschke, K. Hinkelmann, and M. Meyer. COLAB: A Hybrid Knowledge Compilation Laboratory. 3rd Int. Workshop on Data, Expert Knowledge and Decisions, Reims, France, 1991.
- [Borgida *et al.*, 1989] A. Borgida, R. J. Brachman, D. L. McGuinness, and L. A. Resnick. CLASSIC: A structural data model for objects. In *International Conference on Management of Data*. ACM SIGMOD, 1989.
- [Brachman and Schmolze, 1985] R. J. Brachman and J. G. Schmolze. An overview of the KL-ONE knowledge representation system. *Cognitive Science*, 9(2):171–216, 1985.
- [Buntine, 1988] W. Buntine. Generalized subsumption and its applications on induction and redundancy. *Artificial Intelligence*, 36:149–176, 1988.
- [Jaffar and Lassez, 1987] J. Jaffar and J.-L. Lassez. Constraint logic programming. In *Proc. POPL-87, Munich, Germany*, pages 111–119. ACM, January 1987.
- [Nebel, 1990] B. Nebel. *Reasoning and Revision in Hybrid Representation Systems*, volume 422 of *LNAI*. Springer, 1990.
- [Plotkin, 1971a] G. D. Plotkin. *Automatic Methods of Inductive Inference*. PhD thesis, University of Edinburgh, 1971.
- [Plotkin, 1971b] G. D. Plotkin. A further note on inductive generalization. In B. Meltzer and D. Mitchie, editors, *Machine Intelligence*, volume 6, pages 101–124. Elsevier, North-Holland, 1971.

[Smolka, 1989] G. Smolka. *Logic Programming over Polymorphically Order-Sorted Types*. PhD thesis, University of Kaiserslautern, Germany, May 1989.



Deutsches
Forschungszentrum
für Künstliche
Intelligenz GmbH

DFKI
-Bibliothek-
PF 2080
D-6750 Kaiserslautern
FRG

DFKI Publikationen

Die folgenden DFKI Veröffentlichungen sowie die aktuelle Liste von allen bisher erschienenen Publikationen können von der oben angegebenen Adresse bezogen werden.

Die Berichte werden, wenn nicht anders gekennzeichnet, kostenlos abgegeben.

DFKI Publications

The following DFKI publications or the list of all published papers so far can be ordered from the above address.

The reports are distributed free of charge except if otherwise indicated.

DFKI Research Reports

RR-91-24

Jochen Heinsohn: A Hybrid Approach for Modeling Uncertainty in Terminological Logics
22 pages

RR-91-25

Karin Harbusch, Wolfgang Finkler, Anne Schauder: Incremental Syntax Generation with Tree Adjoining Grammars
16 pages

RR-91-26

M. Bauer, S. Biundo, D. Dengler, M. Hecking, J. Koehler, G. Merziger: Integrated Plan Generation and Recognition - A Logic-Based Approach -
17 pages

RR-91-27

A. Bernardi, H. Boley, Ph. Hanschke, K. Hinkelmann, Ch. Klauck, O. Kühn, R. Legleitner, M. Meyer, M. M. Richter, F. Schmalhofer, G. Schmidt, W. Sommer: ARC-TEC: Acquisition, Representation and Compilation of Technical Knowledge
18 pages

RR-91-28

Rolf Backofen, Harald Trost, Hans Uszkoreit: Linking Typed Feature Formalisms and Terminological Knowledge Representation Languages in Natural Language Front-Ends
11 pages

RR-91-29

Hans Uszkoreit: Strategies for Adding Control Information to Declarative Grammars
17 pages

RR-91-30

Dan Flickinger, John Nerbonne: Inheritance and Complementation: A Case Study of Easy Adjectives and Related Nouns
39 pages

RR-91-31

H.-U. Krieger, J. Nerbonne: Feature-Based Inheritance Networks for Computational Lexicons
11 pages

RR-91-32

Rolf Backofen, Lutz Euler, Günther Görz: Towards the Integration of Functions, Relations and Types in an AI Programming Language
14 pages

RR-91-33

Franz Baader, Klaus Schulz: Unification in the Union of Disjoint Equational Theories: Combining Decision Procedures
33 pages

RR-91-34

Bernhard Nebel, Christer Bäckström: On the Computational Complexity of Temporal Projection and some related Problems
35 pages

RR-91-35

Winfried Graf, Wolfgang Maaß: Constraint-basierte Verarbeitung graphischen Wissens
14 Seiten

RR-92-01

Werner Nutt: Unification in Monoidal Theories is Solving Linear Equations over Semirings
57 pages

RR-92-02

Andreas Dengel, Rainer Bleisinger, Rainer Hoch, Frank Hönes, Frank Fein, Michael Malburg:

Π_{ODA} : The Paper Interface to ODA

53 pages

RR-92-03

Harold Boley:

Extended Logic-plus-Functional Programming

28 pages

RR-92-04

John Nerbonne: Feature-Based Lexicons:

An Example and a Comparison to DATR

15 pages

RR-92-05

Ansgar Bernardi, Christoph Klauck, Ralf Legleitner, Michael Schulte, Rainer Stark:

Feature based Integration of CAD and CAPP

19 pages

RR-92-06

Achim Schupetea: Main Topics of DAI: A Review

38 pages

RR-92-07

Michael Beetz:

Decision-theoretic Transformational Planning

22 pages

RR-92-08

Gabriele Merziger: Approaches to Abductive Reasoning - An Overview -

46 pages

RR-92-09

Winfried Graf, Markus A. Thies:

Perspektiven zur Kombination von automatischem Animationsdesign und planbasierter Hilfe

15 Seiten

RR-92-10

M. Bauer: An Interval-based Temporal Logic in a Multivalued Setting

17 pages

RR-92-11

Susane Biundo, Dietmar Dengler, Jana Koehler:

Deductive Planning and Plan Reuse in a Command Language Environment

13 pages

RR-92-13

Markus A. Thies, Frank Berger:

Planbasierte graphische Hilfe in objektorientierten Benutzungsoberflächen

13 Seiten

RR-92-14

Intelligent User Support in Graphical User Interfaces:

1. InCome: A System to Navigate through Interactions and Plans

Thomas Fehrle, Markus A. Thies

2. Plan-Based Graphical Help in Object-Oriented User Interfaces

Markus A. Thies, Frank Berger

22 pages

RR-92-15

Winfried Graf: Constraint-Based Graphical Layout of Multimodal Presentations

23 pages

RR-92-16

Jochen Heinsohn, Daniel Kudenko, Bernhard Nebel, Hans-Jürgen Profitlich: An Empirical Analysis of

Terminological Representation Systems

38 pages

RR-92-17

Hassan Ait-Kaci, Andreas Podelski, Gert Smolka:

A Feature-based Constraint System for Logic Programming with Entailment

23 pages

RR-92-18

John Nerbonne: Constraint-Based Semantics

21 pages

RR-92-19

Ralf Legleitner, Ansgar Bernardi, Christoph Klauck PIM: Planning In Manufacturing using Skeletal Plans and Features

17 pages

RR-92-20

John Nerbonne: Representing Grammar, Meaning and Knowledge

18 pages

RR-92-21

Jörg-Peter Mohren, Jürgen Müller

Representing Spatial Relations (Part II) -The Geometrical Approach

25 pages

RR-92-22

Jörg Würtz: Unifying Cycles

24 pages

RR-92-23

Gert Smolka, Ralf Treinen:

Records for Logic Programming

38 pages

RR-92-24

Gabriele Schmidt: Knowledge Acquisition from Text in a Complex Domain

20 pages

RR-92-25

Franz Schmalhofer, Ralf Bergmann, Otto Kühn, Gabriele Schmidt: Using integrated knowledge acquisition to prepare sophisticated expert plans for their re-use in novel situations
12 pages

RR-92-26

Franz Schmalhofer, Thomas Reinartz, Bidjan Tschaitchian: Intelligent documentation as a catalyst for developing cooperative knowledge-based systems
16 pages

RR-92-27

Franz Schmalhofer, Jörg Thoben: The model-based construction of a case-oriented expert system
18 pages

RR-92-29

Zhaohur Wu, Ansgar Bernardi, Christoph Klauck: Skeletal Plans Reuse: A Restricted Conceptual Graph Classification Approach
13 pages

RR-92-33

Franz Baader
Unification Theory
22 pages

RR-92-34

Philipp Hanschke
Terminological Reasoning and Partial Inductive Definitions
23 pages

RR-92-35

Manfred Meyer
Using Hierarchical Constraint Satisfaction for Lathe-Tool Selection in a CIM Environment
18 pages

RR-92-36

Franz Baader, Philipp Hanschke
Extensions of Concept Languages for a Mechanical Engineering Application
15 pages

RR-92-37

Philipp Hanschke
Specifying Role Interaction in Concept Languages
26 pages

RR-92-38

Philipp Hanschke, Manfred Meyer
An Alternative to H-Subsumption Based on Terminological Reasoning
9 pages

DFKI Technical Memos**TM-91-11**

Peter Wazinski: Generating Spatial Descriptions for Cross-modal References
21 pages

TM-91-12

Klaus Becker, Christoph Klauck, Johannes Schwagereit: FEAT-PATR: Eine Erweiterung des D-PATR zur Feature-Erkennung in CAD/CAM
33 Seiten

TM-91-13

Knut Hinkelmann:
Forward Logic Evaluation: Developing a Compiler from a Partially Evaluated Meta Interpreter
16 pages

TM-91-14

Rainer Bleisinger, Rainer Hoch, Andreas Dengel:
ODA-based modeling for document analysis
14 pages

TM-91-15

Stefan Bussmann: Prototypical Concept Formation An Alternative Approach to Knowledge Representation
28 pages

TM-92-01

Lijuan Zhang:
Entwurf und Implementierung eines Compilers zur Transformation von Werkstückrepräsentationen
34 Seiten

TM-92-02

Achim Schupeta: Organizing Communication and Introspection in a Multi-Agent Blocksworld
32 pages

TM-92-03

Mona Singh
A Cognitive Analysis of Event Structure
21 pages

TM-92-04

Jürgen Müller, Jörg Müller, Markus Pischel, Ralf Scheidhauer:
On the Representation of Temporal Knowledge
61 pages

TM-92-05

Franz Schmalhofer, Christoph Globig, Jörg Thoben
The refitting of plans by a human expert
10 pages

TM-92-06

Otto Kühn, Franz Schmalhofer: Hierarchical skeletal plan refinement: Task- and inference structures
14 pages

DFKI Documents

D-91-17

Andreas Becker:

Analyse der Planungsverfahren der KI im Hinblick auf ihre Eignung für die Arbeitsplanung
86 Seiten

D-91-18

Thomas Reinartz: Definition von Problemklassen im Maschinenbau als eine Begriffsbildungsaufgabe
107 Seiten

D-91-19

Peter Wazinski: Objektllokalisierung in graphischen Darstellungen
110 Seiten

D-92-01

Stefan Bussmann: Simulation Environment for Multi-Agent Worlds - Benutzeranleitung
50 Seiten

D-92-02

Wolfgang Maaß: Constraint-basierte Platzierung in multimodalen Dokumenten am Beispiel des Layout-Managers in WIP
111 Seiten

D-92-03

Wolfgang Maaß, Thomas Schiffmann, Dudung Soetopo, Winfried Graf: LAYLAB: Ein System zur automatischen Platzierung von Text-Bild-Kombinationen in multimodalen Dokumenten
41 Seiten

D-92-04

Judith Klein, Ludwig Dickmann: DiTo-Datenbank - Datendokumentation zu Verbreitung und Koordination
55 Seiten

D-92-06

Hans Werner Höper: Systematik zur Beschreibung von Werkstücken in der Terminologie der Featuresprache
392 Seiten

D-92-07

Susanne Biundo, Franz Schmalhofer (Eds.): Proceedings of the DFKI Workshop on Planning
65 pages

D-92-08

Jochen Heinsohn, Bernhard Hollunder (Eds.): DFKI Workshop on Taxonomic Reasoning Proceedings
56 pages

D-92-09

Gernod P. Laufkötter: Implementierungsmöglichkeiten der integrativen Wissensakquisitionsmethode des ARC-TEC-Projektes
86 Seiten

D-92-10

Jakob Mauss: Ein heuristisch gesteuerter Chart-Parser für attributierte Graph-Grammatiken
87 Seiten

D-92-11

Kerstin Becker: Möglichkeiten der Wissensmodellierung für technische Diagnose-Expertensysteme
92 Seiten

D-92-12

Otto Kühn, Franz Schmalhofer, Gabriele Schmidt: Integrated Knowledge Acquisition for Lathe Production Planning: a Picture Gallery (Integrierte Wissensakquisition zur Fertigungsplanung für Drehteile: eine Bildergalerie)
27 pages

D-92-13

Holger Peine: An Investigation of the Applicability of Terminological Reasoning to Application-Independent Software-Analysis
55 pages

D-92-15

DFKI Wissenschaftlich-Technischer Jahresbericht 1991
130 Seiten

D-92-16

Judith Engelkamp (Hrsg.): Verzeichnis von Softwarekomponenten für natürlichsprachliche Systeme
189 Seiten

D-92-17

Elisabeth André, Robin Cohen, Winfried Graf, Bob Kass, Cécile Paris, Wolfgang Wahlster (Eds.): UM92: Third International Workshop on User Modeling, Proceedings
254 pages
Note: This document is available only for a nominal charge of 25 DM (or 15 US-\$).

D-92-18


Klaus Becker: Verfahren der automatisierten Diagnose technischer Systeme
109 Seiten

D-92-19

Stefan Dittrich, Rainer Hoch: Automatische, Deskriptor-basierte Unterstützung der Dokumentanalyse zur Fokussierung und Klassifizierung von Geschäftsbriefen
107 Seiten

D-92-21

Anne Schauder: Incremental Syntactic Generation of Natural Language with Tree Adjoining Grammars
57 pages

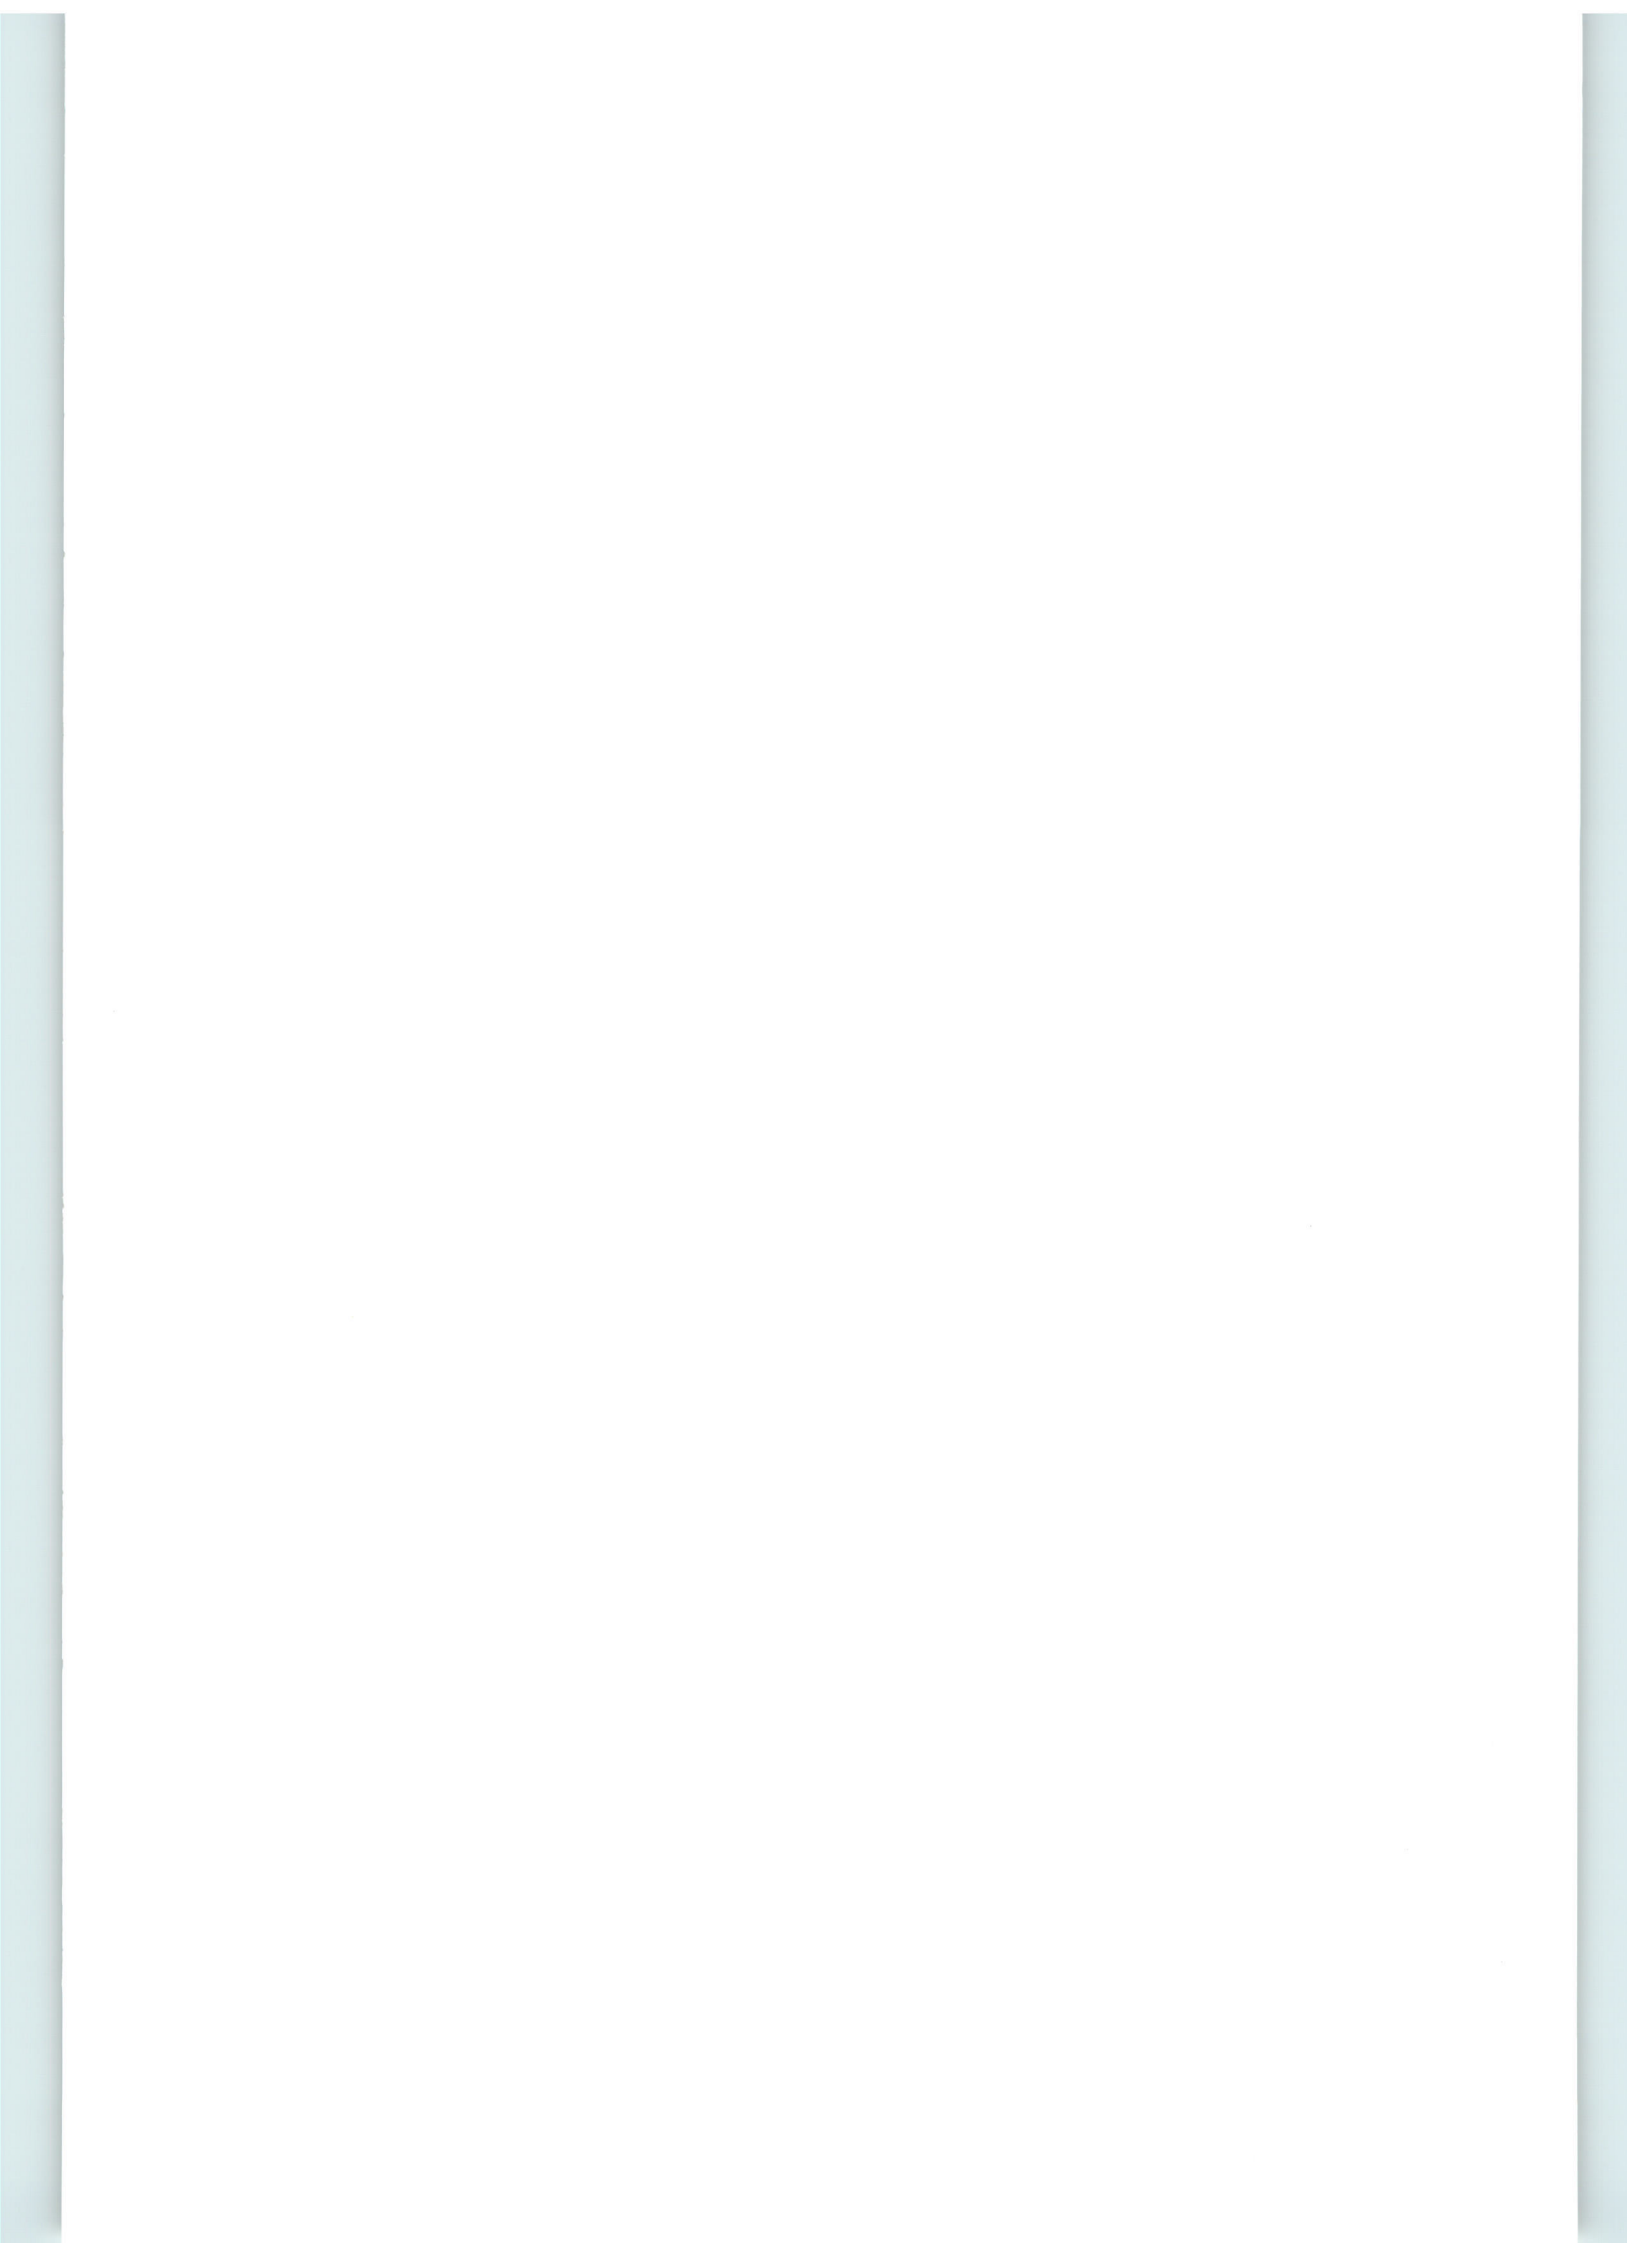

An Alternative to Θ -Subsumption Based on Terminological Reasoning

Philipp Hanschke, Manfred Meyer

RR-92-38

Research Report